

Description

The **NA-FFA381-A10-1** is a high SNR, small package, single-ended output top port analog MEMS microphone, consists of a MEMS sensor and a low noise level ASIC.



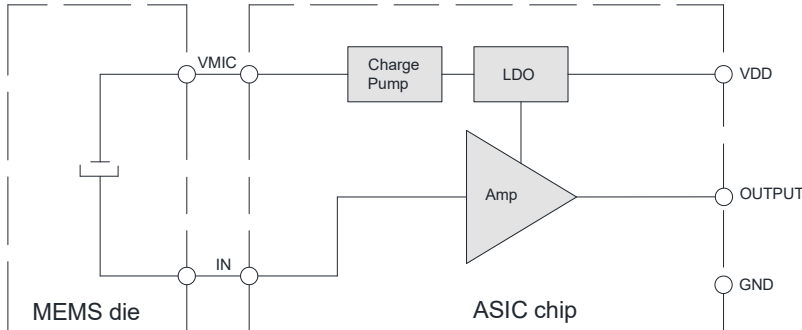


Fig. 1 Microphone block diagram



Top View



Bottom View

Key Features

- ✧ 2.75x1.85x1.0mm Top Port
- ✧ Small Package
- ✧ High SNR
- ✧ Narrow Sensitivity +/-1dB
- ✧ RF Shielded
- ✧ Compatible with Standard SMD Reflow Technology
- ✧ RoHS Compliance & Halogen Free

Typical Applications

- ✧ TWS Earphone
- ✧ Wireless Headsets
- ✧ Smart Speakers
- ✧ Wearable Electronics
- ✧ Portable Electronics
- ✧ Smart Home Electronics

Maximum Ratings

Stresses at the maximum ratings shown in Table 1 may cause permanent damage to the device. These are stress ratings only at which the device may not function when an operation at these or any other condition beyond those specified under “Electro-Acoustic Specifications”.

Table 1 Maximum Ratings

Parameter	Maximum Ratings	Unit
Supply voltage	4.2	V
Operation temperature range	-40~85	°C
Storage temperature range	-40~100	°C

Electro-Acoustic Specifications

Table 2 Electrical Specifications

Test condition: +25±2°C, 60%~70%RH, 86~106Kpa, Vdd=2V, no load, unless otherwise specified.

No.	Parameter	Symbol	Condition	Min.	Nom.	Max.	Unit
1	Sensitivity	S	f=1KHz, Pin=1Pa, 0dB=1V/Pa	-39	-38	-37	dB
2	Operating Voltage	V _{DD}		1.6	2	3.6	V
3	Directivity			Omni-directional			
4	Polarity		Sound pressure increase	Output voltage increase			
5	Sensitivity vs. Voltage	ΔS	Vs= 3.6V to 1.6V	<0.5			dB
6	Output Impedance	Z _{OUT}	f=1KHz			400	Ω
7	Current Consumption ¹	I	1.6 V to 3.6V		120	200	μA
8	S/N Ratio	S/N	A-Weighted	62	64		dBA
9	Total Harmonic Distortion	THD	94dBSPL@1KHz		0.05	0.5	%
			123dBSPL@1KHz		1		
10	Acoustic Overload Point	AOP	THD 10%@1KHz		127		dBSPL
11	Power Supply Rejection	PSR	100mVpp Square-wave @217Hz, A-weighted		-105	-95	dB
12	Power Supply Rejection Ratio	PSRR	200mVpp Sinewave @1KHz	60	72		dB
13	DC output	VDC			0.85		V
14	Output load	C _{load}				100	pF
		R _{load}		8			K Ω

Note: Frequency response, sensitivity and current consumption are tested by 100% on product line.

Performance Curves

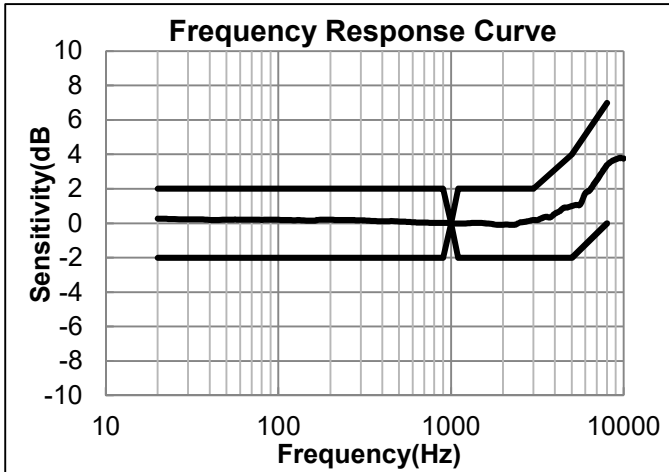


Fig. 2 Frequency response curve normalized to 1KHz

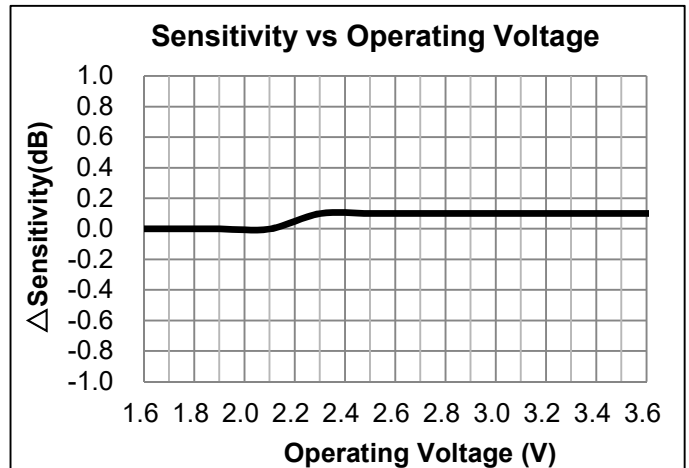


Fig. 3 Sensitivity vs Operating Voltage

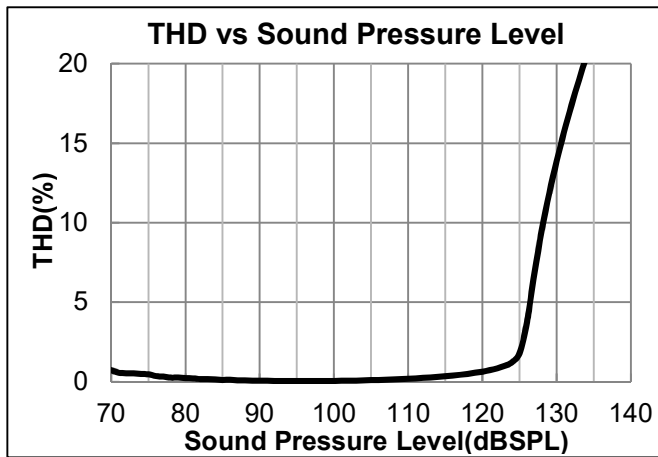


Fig. 4 Typical THD vs Sound Pressure Level

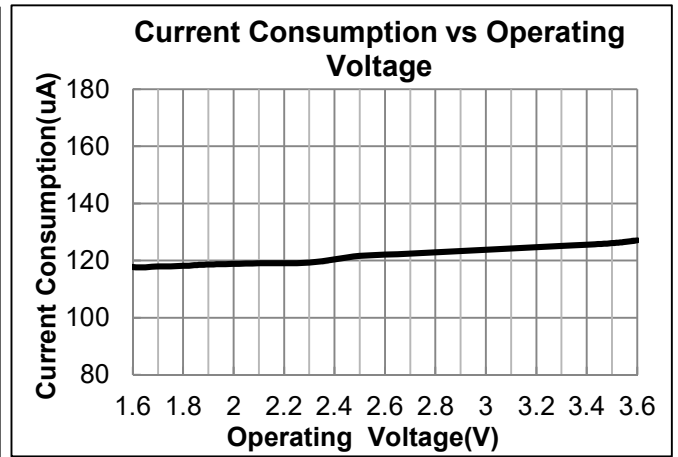


Fig. 5 Typical Current vs Operating Voltage

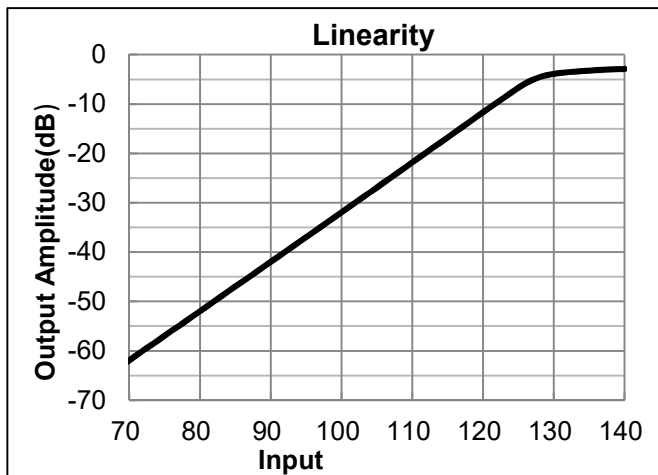


Fig. 6 Linearity

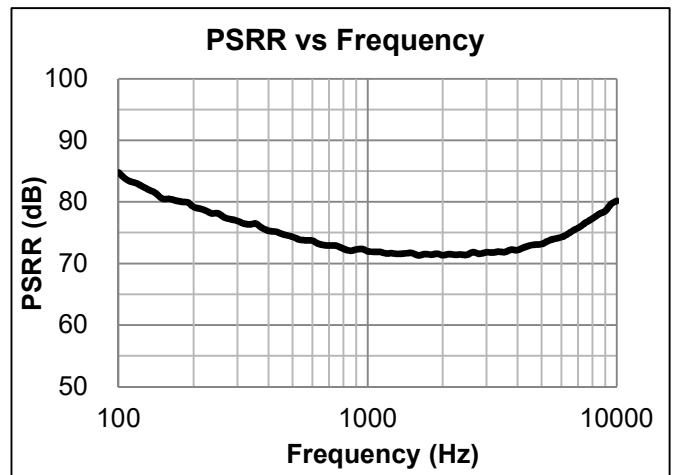


Fig. 7 Typical PSRR curve

Measurement System Setup

Test signal: Sinusoid, Sweep,

Step: 1/12 octave

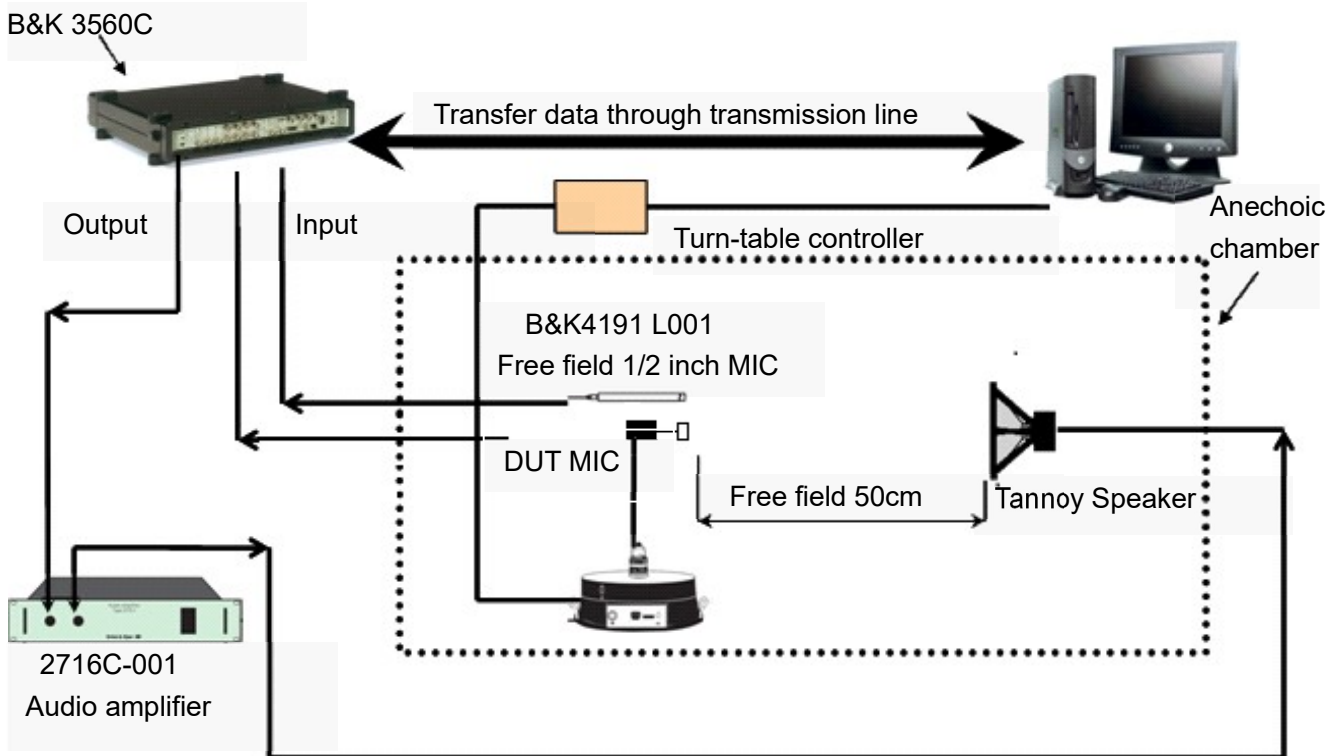


Fig. 8 Measurement System Setup

Typical Application Circuit

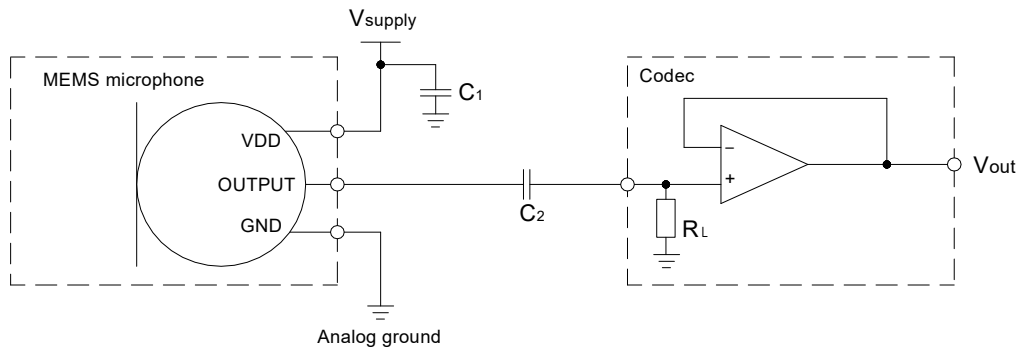


Fig. 9 Typical Application Circuit

Power supply decoupling:

A 0.1uF ceramic type decoupling capacitor C_1 is strongly recommended for every microphone and it should be placed as close to the VDD pad to reduce the noise on power supply;

The trace connected to each pad of capacitor should be as short as possible, and should stay on one layer of PCB without via. For the best performance, recommend to place the capacitor equidistance from power and ground pins of microphone, or slightly closer to the power pin if space not allowed. System ground should connect to far side of the capacitor, as shown in fig.10.

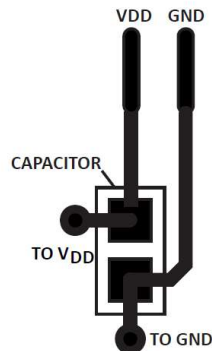


Fig. 10 Recommended Power Supply Decoupling Capacitor Layout


Low frequency roll-off:

DC-blocking capacitor C_2 is required on the output signal line. The 3-dB cut-off frequency can be calculated using follow equation which is related to DC-blocking capacitor C_2 and input resistance of the differential input amplifier.

$$3\text{dB cut-off frequency} = 1/2\pi R_L C_2$$

In order to get a cut-off frequency below 20 Hz, minimum 1uF value of C_2 minimum 20KΩ value of input resistance of the differential input amplifier is recommended.

Mechanical Specifications

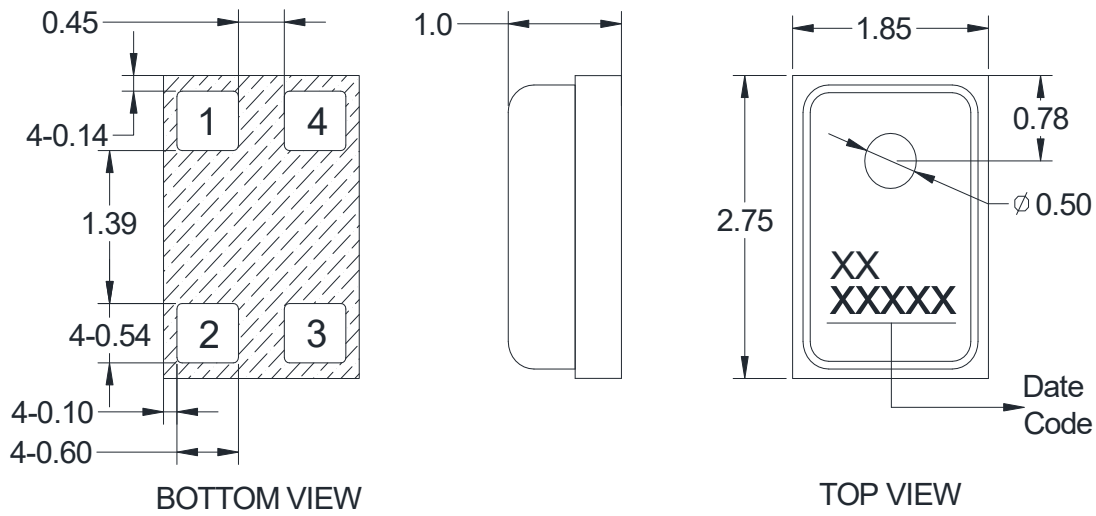

Unit: mm Unmarked Tolerance: ± 0.1 (mm)

Fig. 11 Dimension

Item	Dimension	Tolerance	PIN	Definition	Description
Length	2.75	± 0.1	1	VDD	Power Supply
Width	1.85	± 0.1	2	GND	Ground
Height	1.0	± 0.1	3	GND	Ground
Acoustic Port	0.50	± 0.05	4	Output	Output Signal

Note:

- All Ground Pin must be connected to the ground in end application
- Identification Marking

XX—Serial Number

XXXXX

Lot Number
 Day
 Month
 Year

Reliability Specifications

After conducting any of the following tests, the sensitivity change of DUT shall be less than $\pm 3\text{dB}$ from its initial value unless otherwise noted, and shall keep its initial operation and appearance.

Table 3 Reliability Specifications

No.	Item	Test condition
1	Hi-Temperature Test	Temperature: $+85^{\circ}\text{C}$ Duration: 240 hours
2	Low-Temperature Test	Temperature: -40°C Duration: 240 hours
3	Humidity & Heat operating Test	Temperature: $+70^{\circ}\text{C}$ Humidity: 93% RH Duration: 240 hours
4	Thermal Shocking Test	Temperature & Duration: -40°C , 30 minutes Temperature & Duration: $+80^{\circ}\text{C}$, 30 minutes, Cycles: 32 cycles
5	Vibration Test	Frequency: 10-55Hz Amplitude: 1.52mm Direction: 2 directions Duration: 2 hours
6	Drop Test	Drop the microphones to the floor without package. Height: 1.5m Reference Surface: slippery marble floor Duration: 5 times
7	Electrostatic Discharge	The tests are performed acc. to IEC61000-4-2 level 3: a. Contact Discharge Discharge Position: Output of Microphone Charge Voltage: $\pm 6000\text{VDC}$ Discharge Network: 150pF & 330 Ω b. Air Discharge Discharge Position: Sound Hole Charge Voltage: $\pm 8000\text{VDC}$ Discharge Network: 150pF & 330 Ω

Packaging Details

- * Use ESD reel and tape for microphone packaging.
- * Anti-static measures should be applied during packaging operation.


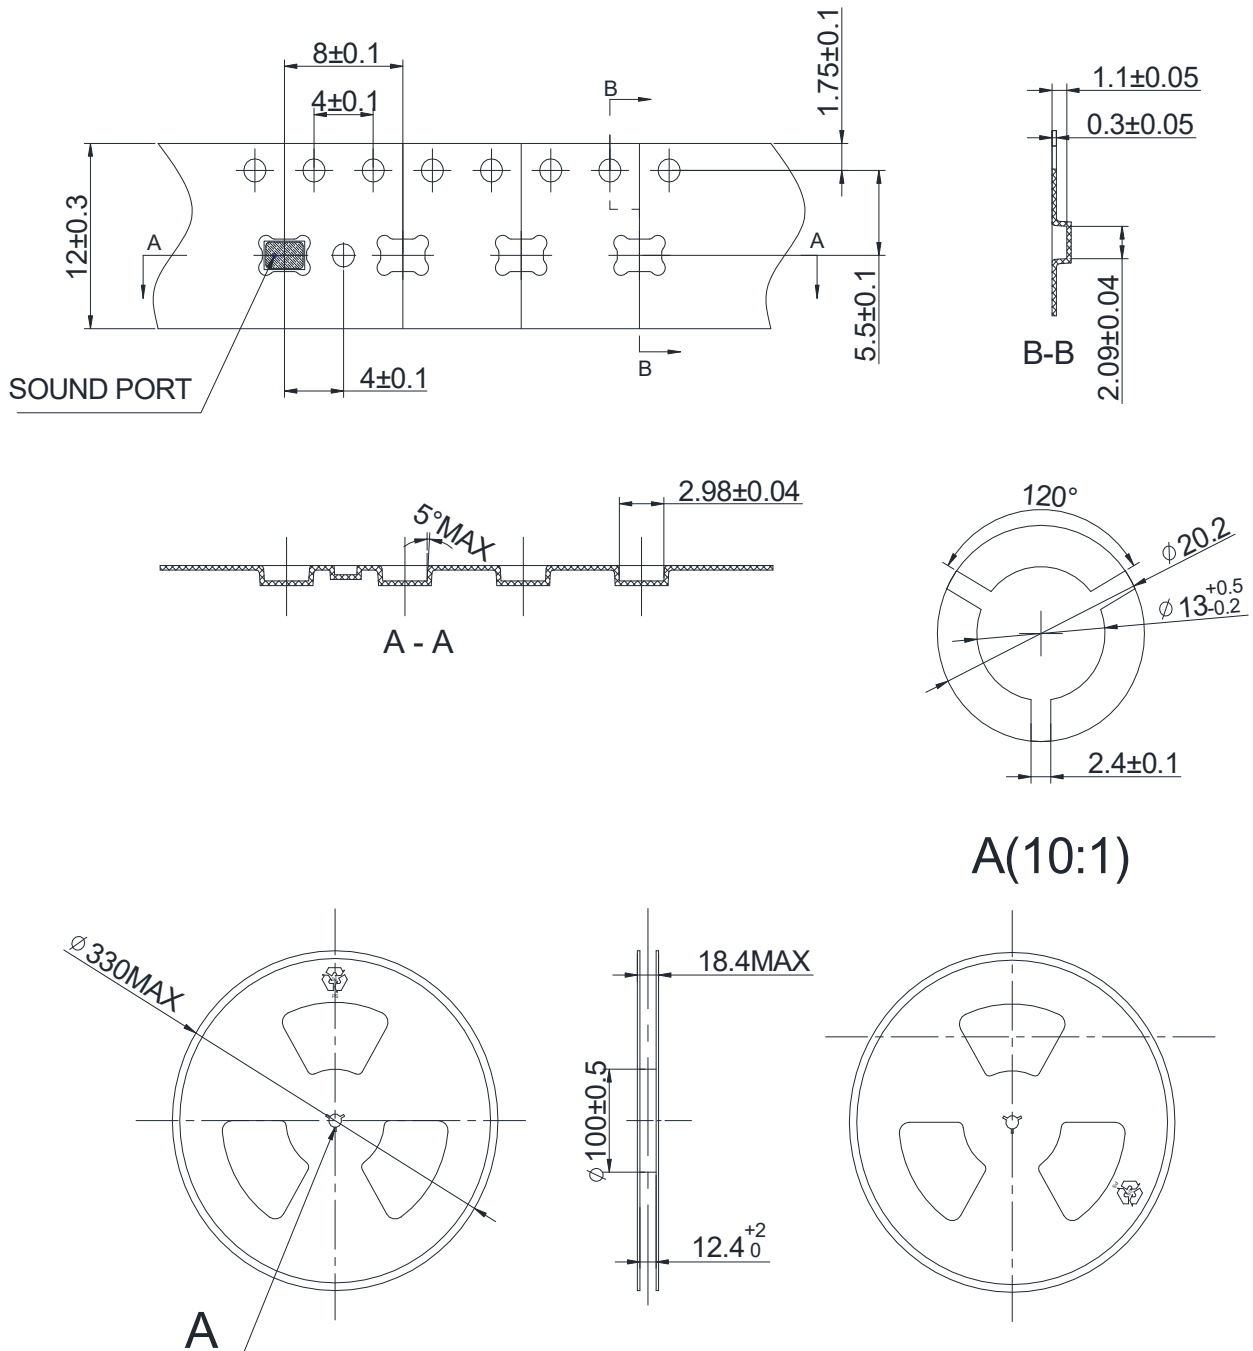



Fig. 12 Packaging

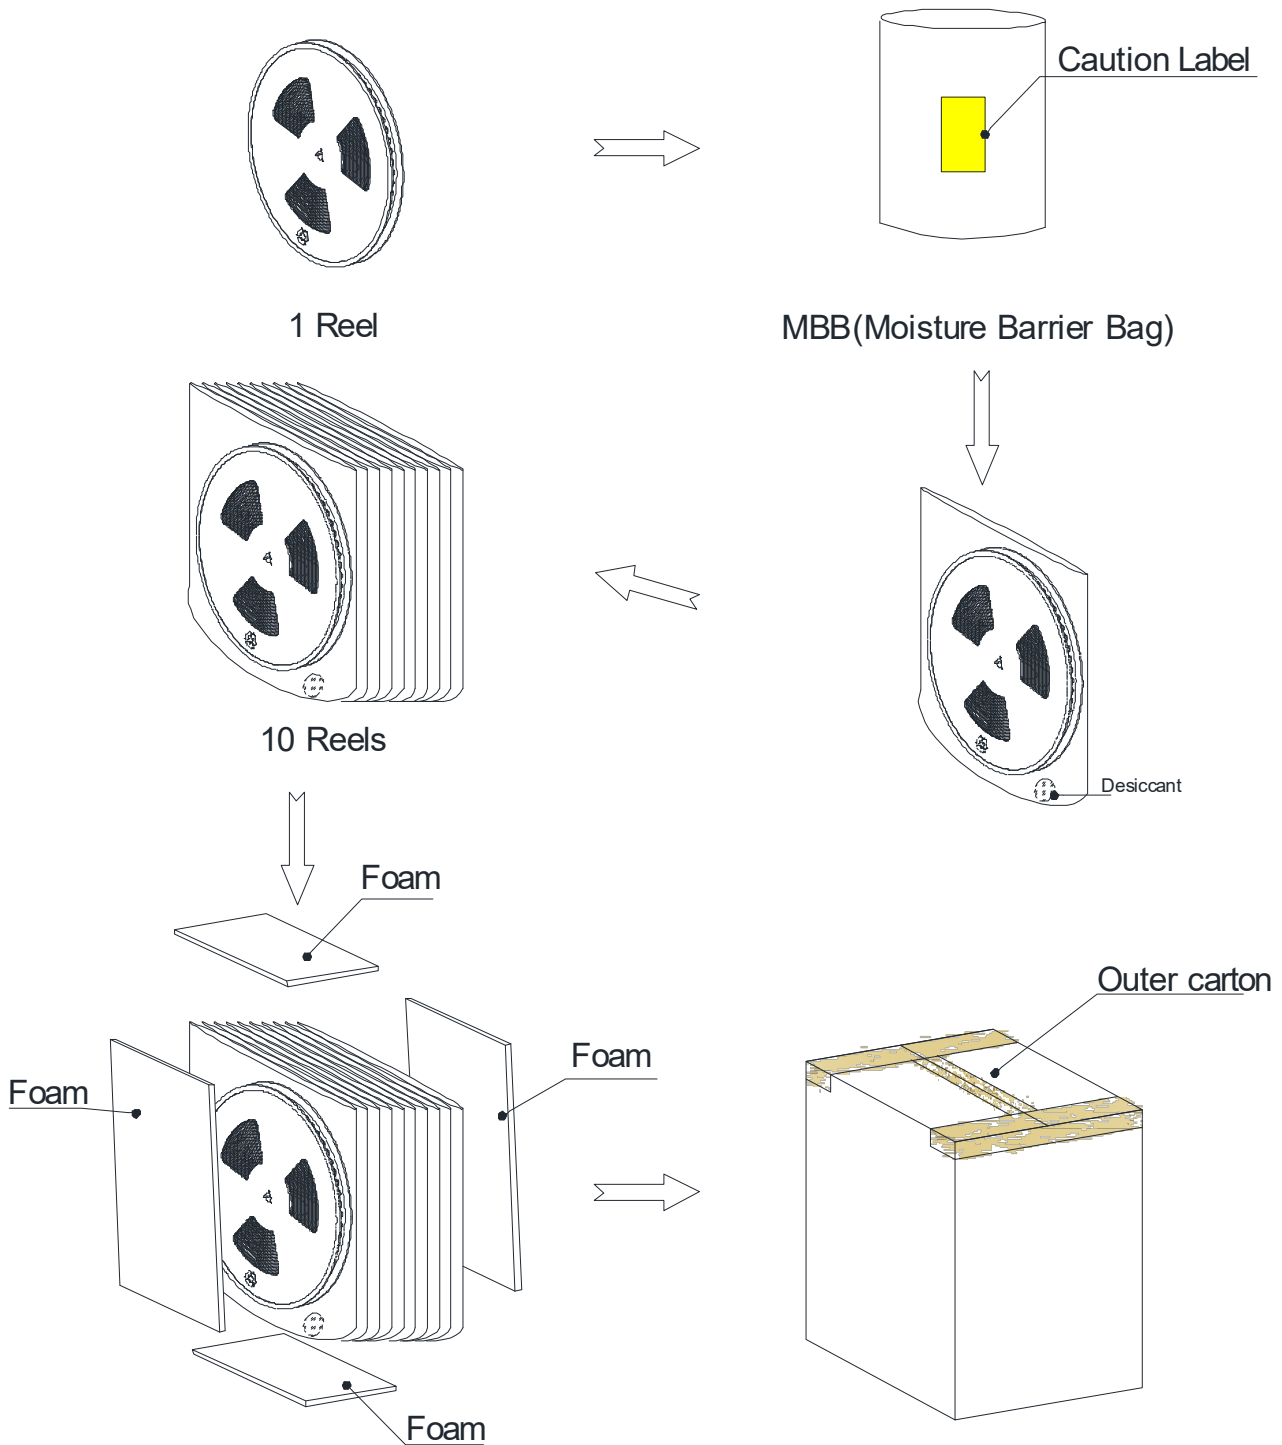


Tape and Reel	φ330mm	5,500PCS×1=5,500PCS
Shipping Box	215mm*370mm*370mm	5,500PCS×10=55,000PCS

Application Design Suggestions

Recommended PCB and Stencil Design Pattern

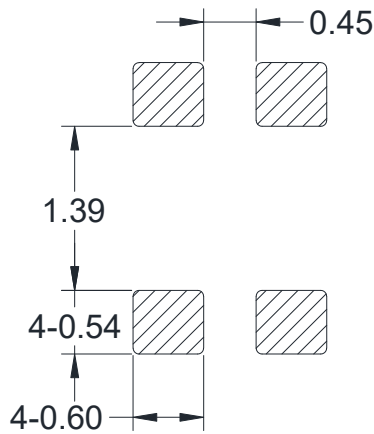

Example Land Pattern

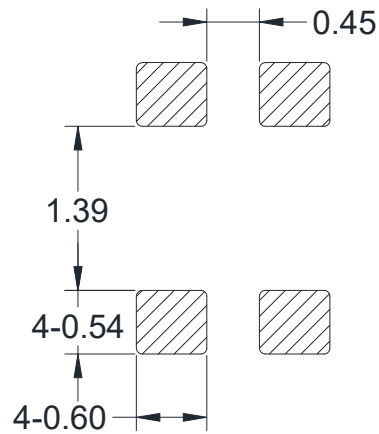

Example Solder Stencil Pattern

Notes:

- Dimensions are in millimeters unless otherwise specified.
- Tolerance is $\pm 0.1\text{mm}$ unless otherwise specified.

Temperature Profile during Reflow Process

Table 4 Temperature Profile during Reflow Process

Parameter		Reference	Specification
Average Ramp Rate		T_L to T_P	3°C/sec max
Preheat	Minimum Temperature	T_{SMIN}	150°C
	Maximum Temperature	T_{SMAX}	200°C
	Time T_{SMIN} to T_{SMAX}	t_s	60 sec to 180 sec
Ramp-Up Rate		T_{SMAX} to T_L	1.25°C/sec
Time Maintained Above Liquidous		t_L	60 sec to 150 sec
Liquidous Temperature		T_L	217°C
Peak Temperature		T_P	260°C
Time Within +5°C of Actual Peak Temperature		t_P	20 sec to 40 sec
Ramp-Down Rate		T_P to T_{SMAX}	6°C/sec max
Time +25°C ($t_{25^\circ\text{C}}$) to Peak Temperature			8 min max

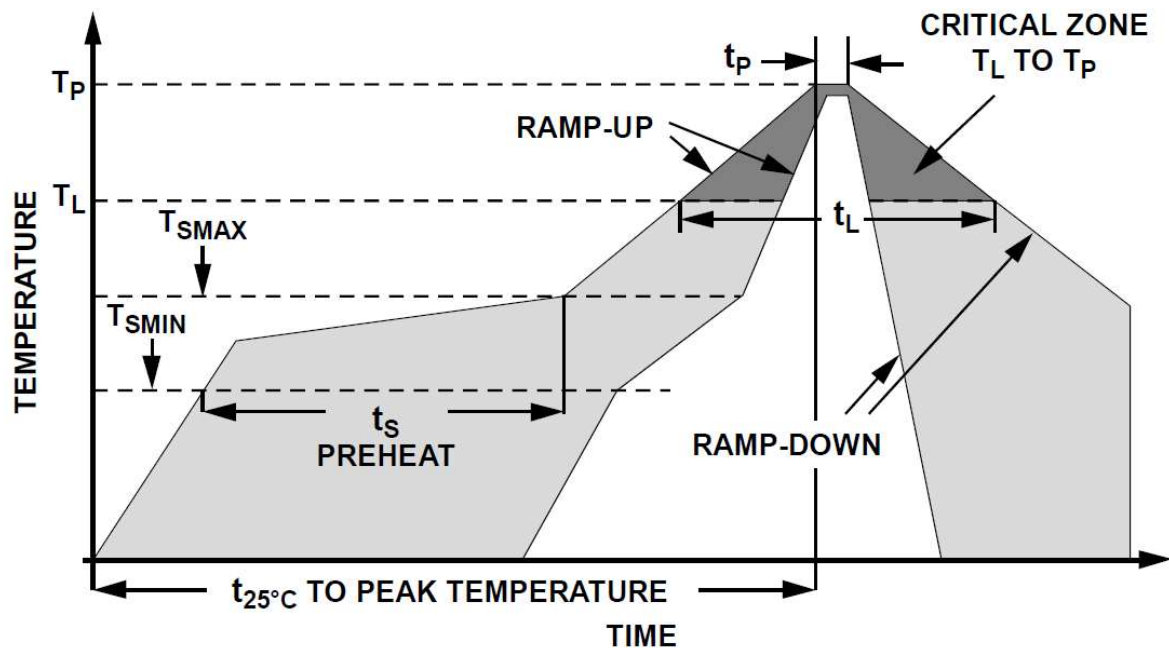


Fig. 13 Reflow Profile

Additional Notes:

- Mic should cool to room temp before next flow cycle if more reflow is needed.
- No more than 3 times reflow is recommended.
- Do not board wash by liquid or ultrasonic after the reflow process.
- Do not pull a vacuum over port hole of the microphone.
- Do not insert any object in port hole of device at any time.
- Suggest SMT the microphone at last time if double side PCBA used.
- Do not seal sound port during reflow .
- If there is any leakage risk, the peak temperature should be set to less than 240°C or more than 255°C.

Recommended nozzle for reflow MIC

External diameter is $\Phi 1.3\text{mm}$

Inside diameter is $\Phi 1.0\text{mm}$

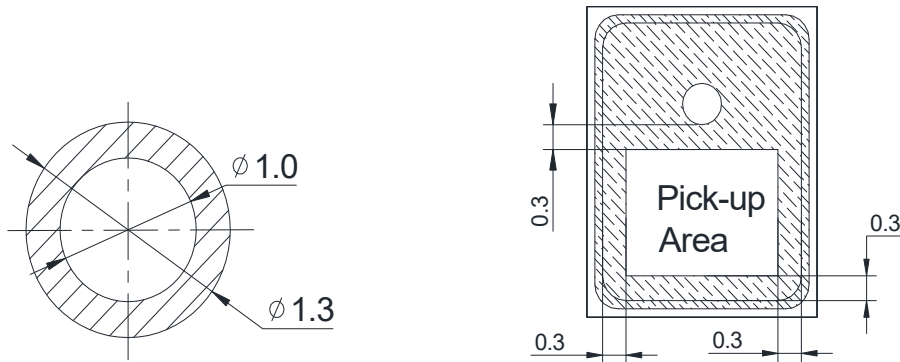


Fig. 14 Recommended nozzle for reflow MIC and Pick-up Area

Special Cautions

Air Rifle Cleaning Restriction

Do not bring air rifle to the port hole directly.

Recommended Condition:

Air pressure < 0.3MPa;

Distance > 5cm;

Time < 5 sec.

Package

Do NOT vacuum seal unused material for storage. Vacuum Sealing can cause mic damage.

Storage

The component needs to meet the requirement of MSL(Moisture Sensitivity Level) class 1. Please keep MICs in warehouse with humidity less than 75% and without sudden temperature change, acid air, and any other harmful air or strong magnetic field.

Please protect products against moist, shock, sunburn and pressure.

Please take proper measures against ESD in the process of assembly and transportation.

Please use the shipping package for long-term storage.

Discard

For microphones to be wasted, customer shall follow the regulation of Waste Electrical and Electronic Equipment (WEEE) Directive (2002/96/EC).

Notes: More application suggestions can be found in the latest "MEMS Microphone Application Notes".

Specification Revisions

Date	Version	Description
04-20-2021	V1.0	Initial release
05-28-2021	V2.0	Updated Electrical Specifications
06-22-2021	V3.0	Updated Electrical Specifications
09-08-2022	V4.0	Updated SNR limit
12-15-2022	V5.0	Updated marking information
05-18-2023	V6.0	Updated reflow specification
05-13-2024	V7.0	Updated Output load